

# TRIATHLON<sup>®</sup>

INTELLIGENT BATTERIES



**Energy. Endurance. Power.**

## ► MD LOADmanagement



### More Intelligent Solutions

Lithium-ion batteries are being used in increasing numbers in modern fleet vehicles. One of the great benefits of this technology is the ability to fast charge at any opportunity. A battery system can be fully charged within an hour.

The TriCOM<sup>®</sup> ion series of high-performance chargers are used for fast charging lithium-ion batteries. Although these chargers have one of the highest charging efficiencies (up to 97%), when multiple batteries are put on charge at the same time, for example during breaks or shift changes, there is a spike in power demand.

This circumstance leads to a high peak demand load on the mains. Power companies then increase the electricity cost based on high demand during those times of the day.

**We can offer you a solution for such situations!**

MD LOADmanagement considerably reduces high peak demand through intelligent load management.

The battery first transmits the current state of charge to the charger. This information is transferred to a master computer, the MD LOAD Control Center.

Based on a battery's state of charge, the individual charger outputs are then controlled via an intelligent algorithm that optimizes the available power without going over the determined peak power demand limit.

The ability to variably adjust the output across a fleet of chargers without going over a predetermined power limit leads to significant cost savings in the price charged from power company.

**MD LOADmanagement reliably ensures optimum availability of the vehicle fleet while at the same time significantly reduces available mains connection power requirements.**



## SYSTEM FEATURES

- ▶ **Intelligent energy management**  
Significant reduction of peak power demand
- ▶ **Maximum usage**  
Highest availability of the vehicle fleet
- ▶ **Significant cost savings**  
Less expensive power
- ▶ **Flexible control of power limit values**  
Based on a set calendar/time function or an input signal from the electric distribution system



## ► Requirements



### **Hardware:**


TRIATHLON<sup>®</sup> Lithium-Ion batteries together with TriCOM<sup>®</sup> ion series chargers and the MD LOAD Control Center enable the use of load management.

The chargers are equipped with additional modules that ensure data exchange with the MD LOAD Control Center.

TRIATHLON<sup>®</sup> Lithium-Ion batteries of the TC series transmit the current state of charge (SOC) and other information to the chargers via CANBUS during charging process.

The data communication can optionally be delivered via network cables or radio interfaces.

**Endurance, productivity and  
maximum performance under  
all conditions**

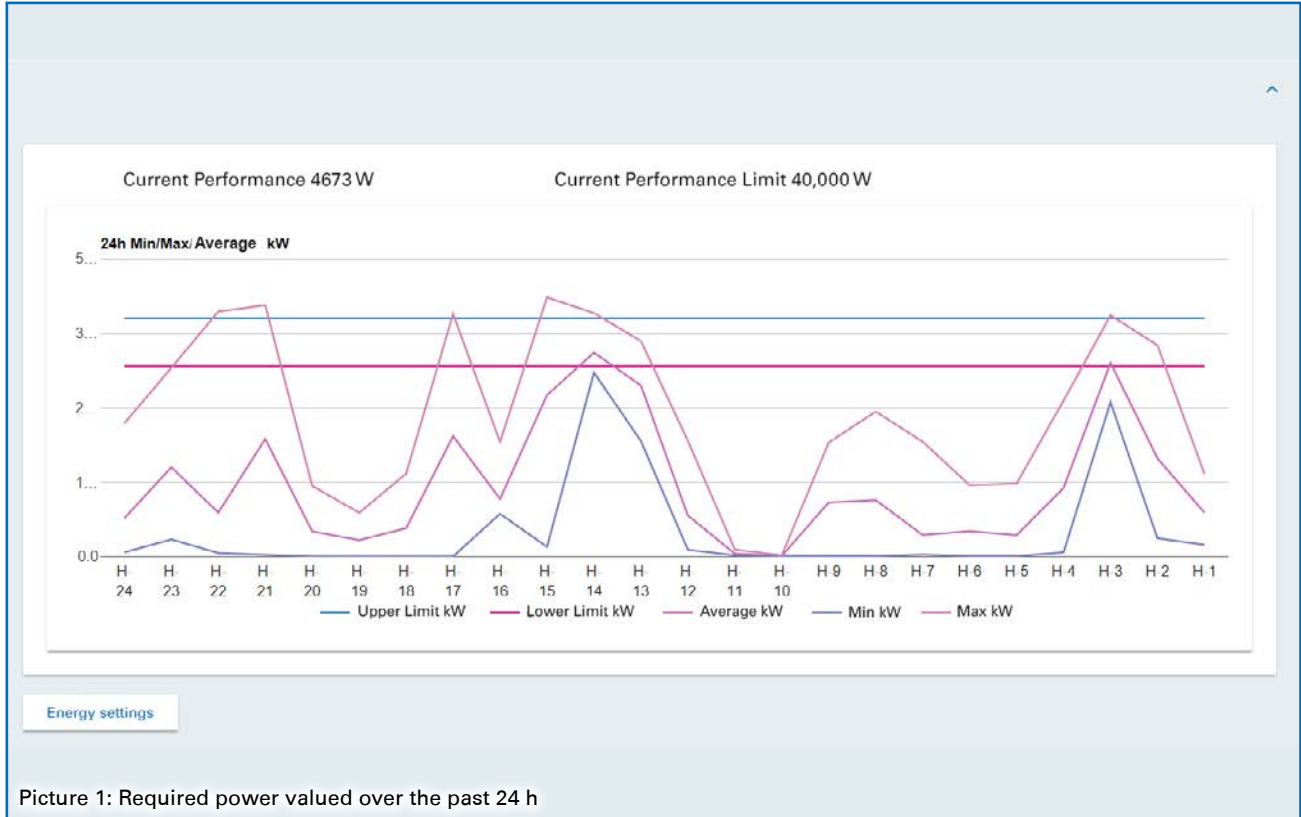

Picture 1: Required power valued over the past 24 h

**Software:**

The MD LOAD Control Center will work together with a building’s demand response or load management system to assure maximum power is available for charging the industrial batteries.

Furthermore, the additional modules in the chargers transmit current information about the state of charge of the batteries.


The MD LOAD Control Center controls the performance of the chargers using a smart algorithm.

Priority sequencing ensures optimal availability of the individual industrial trucks.

As an option, the performance history, various data and current state of charge can be accessed online. (see picture 1 + picture 2)

Among other things, the following data is displayed:

- ▶ Required power values over the past 24 hours
- ▶ Preset limit of the mains peak power
- ▶ Live view of individual chargers
- ▶ Live view of the battery state of charge (SOC)

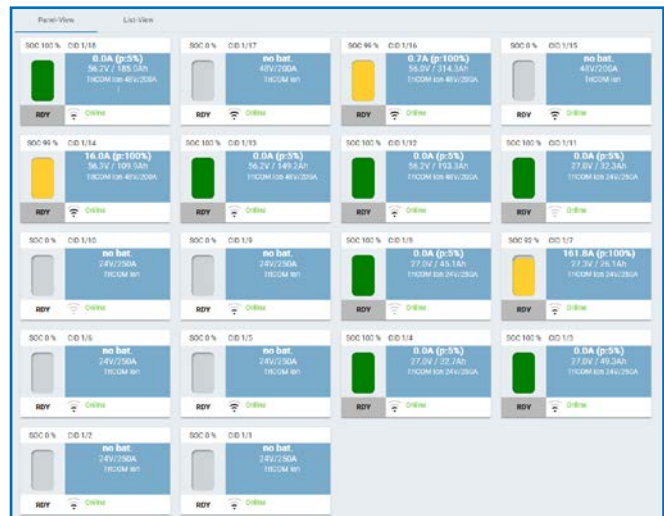

Picture 2: Actual charging status of individual batteries

## ► Function



### **Prioritization of the current output:**

MD LOADmanagement dynamically regulates the energy distribution with an intelligent and demand-oriented priority algorithm so that charging always continues, while maintaining but not exceeding the peak load demand limit. This differs from other load management systems available on the market that only switch the chargers on and off to manage the load.

Every charger utilizes exactly the required and optimal amount of energy available at the defined limit.

The batteries with a high state of charge (SOC) receive less current than the batteries with a low state of charge (SOC).

This ensures that there are no limitations regarding the utilization of the fleet and that all batteries receive exactly the amount of charge they need.

The predetermined maximum peak power demand limit can be set via a calendar function or time specification, or alternatively, it can be regulated automatically by the building's demand response or load management system to assure maximum power is available for charging the industrial batteries.

MD LOADmanagement can be integrated into other peak load control systems at any time to ensure permanent and sustainable current drain without power peaks.

MD LOAD Control Center maintains a data log so that historical data can also be retrieved at any time.

### **Option:**

As a building block for fleet management systems, we can facilitate a completely automatic transmission of all relevant vehicle application, battery and charger data.





**Triathlon Battery Solutions, Inc.**

2025 Midway Road, Suite 200

Lewisville, TX 75056

Tel: +1 469.301.2128

E-Mail: [info@triathlon-batteries.com](mailto:info@triathlon-batteries.com)

Internet: [www.triathlon-batteries.com](http://www.triathlon-batteries.com)